

IA3341

RISC-based embedded computer with 2 serial ports, 4 DIs, 4 DOs, 2 AIs, 2 thermocouples, dual LANs, SD, Linux



- > Moxa ART 32-bit ARM 9 Industrial Processor
- > 64 MB RAM, 16 MB Flash onboard
- > 2 software selectable RS-232/422/485 serial ports
- > 50 bps to 921.6 Kbps serial speed, supporting non-standard baudrates
- > 4 DIs and 4 DOs with 3 KV digital isolation protection
- > 2 AIs and 2 thermocouple inputs; sensor types J, K, T, E, R, S, B, N
- > Dual 10/100 Mbps Ethernet ports for network redundancy
- > SD socket for storage expansion
- > USB 2.0 host
- > Supports Modbus TCP library to retrieve AI and thermocouple data
- > Ready-to-run Linux Kernel 2.6 platform
- > DIN-Rail and wall mount installation
- > Robust, fanless design



Overview

The IA3341, which is designed for solar power and environmental monitoring applications, is based on the MOXA ART ARM9 industrial processor, and features 2 RS-232/422/485 serial ports, dual LANs, 4 digital input channels, and 4 digital output channels. In addition, the IA3341 computer has 2 analog input channels and 2 thermocouple channels, making it the ideal solution for a variety of industrial applications.


By supporting multiple interfaces, the IA3341 can connect to different types of devices, making it particularly well-suited for solar power applications. Meters, sensors, and other devices can all connect easily

to the IA3341, and with its powerful computing platform, the IA3341 can be used as a front-end controller to perform industrial tasks, such as data acquisition, data computing, protocol conversion, and data analysis.

The industrial-grade design of the IA3341 provides a robust, reliable computer that can fit any industrial environment, and the open source Linux platform gives programmers a convenient tool for developing sophisticated, bug-free application software at a lower cost.

As an added plus, the built-in Modbus TCP library makes it easy for users to read AI and thermocouple data, and with the built-in web server, it is easy to send monitoring data back to the control center.

Appearance

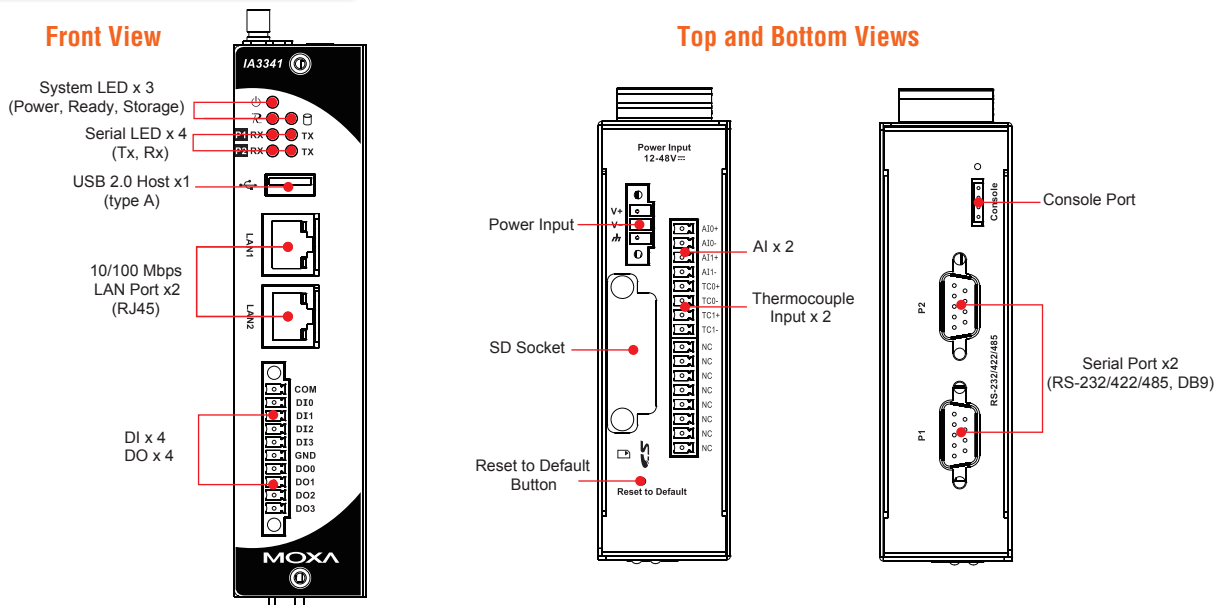

Hardware Specifications

Computer

CPU: MOXA ART ARM9 32-bit RISC CPU, 192 MHz

OS (pre-installed): Embedded Linux

DRAM: 64 MB onboard

Flash: 16 MB onboard

USB: USB 2.0 host x 1 (type A connector)

Storage

Storage Expansion: SD slot

Ethernet Interface

LAN: 2 auto-sensing 10/100 Mbps ports (RJ45)

Magnetic Isolation Protection: 1.5 KV built-in

Serial Interface

Serial Standards: 2 RS-232/422/485 ports, software-selectable (DB9 male)

ESD Protection: 15 KV for all signals

Console Port: RS-232 (TxD, RxD, GND), 4-pin header output (115200, n, 8, 1)

Serial Communication Parameters

Data Bits: 5, 6, 7, 8

Stop Bits: 1, 1.5, 2

Parity: None, Even, Odd, Space, Mark

Flow Control: RTS/CTS, XON/XOFF, ADDC® (automatic data direction control) for RS-485

Baudrate: 50 bps to 921.6 Kbps (supports non-standard baudrates; see user's manual for details)

Serial Signals

RS-232: TxD, RxD, DTR, DSR, RTS, CTS, DCD, GND

RS-422: TxD+, TxD-, RxD+, RxD-, GND

RS-485-4w: TxD+, TxD-, RxD+, RxD-, GND

RS-485-2w: Data+, Data-, GND

Digital Input

Input Channels: 4, source type

Input Voltage: 0 to 30 VDC

Digital Input Levels for Dry Contacts:

- Logic level 0: Close to GND
- Logic level 1: Open

Digital Input Levels for Wet Contacts:

- Logic level 0: +2 V max.
- Logic level 1: +4 V to +30 V

Connector Type: 10-pin screw terminal block (4 points, COM, GND)

Isolation: 3 KV digital isolation

Digital Output

Output Channels: 4, sink type, keeps output status after hot system reset

Output Range: 5 to 30 VDC at open collector to 30 V

Max. Load: 30 mA

Power Dissipation: 300 mW

Connector Type: 10-pin screw terminal block (4 points, GND)

Isolation: 3 KV digital isolation

Analog Input

Input Channels: 2

Resolution: 16 bits

I/O Mode: Voltage/Current

Input Range: 0-10 V, 4-20 mA

Accuracy:

- ±0.1% FSR @ 25°C
- ±0.3% FSR @ 10°C and 60°C

Sampling Rate: 12 samples/sec

Input Impedance: 200K ohms

Thermocouple Input

Input Channels: 2

Sensor Types: J, K, T, E, R, S, B, N

Sampling Rate: 12 samples/sec

Resolution: 16 bits

Accuracy:

- ±0.1% FSR @ 25°C
- ±0.3% FSR @ 10°C and 60°C

Input Impedance: 1M ohms

LEDs

System: Power, Ready, Storage

LAN: 10M/Link x 2, 100M/Link x 2 (on connector)

Serial: TxD x 2, RxD x 2

Reset Button: Supports "Reset to Factory Default"

Physical Characteristics

Housing: SECC sheet metal (1 mm)

Weight: 585 g

Dimensions: 116 x 35 x 146 mm (2.95 x 1.38 x 3.71 in)

Mounting: DIN-Rail, wall

Environmental Limits

Operating Temperature: -10 to 60°C (14 to 140°F)

Operating Humidity: 5 to 95% RH

Storage Temperature: -20 to 80°C (-4 to 176°F)

Anti-vibration: 2 g rms @ IEC 60068-2-34, random wave, 5-500 Hz, 1 hr per axis

Anti-shock: 20 g @ IEC 60068-2-27, half sine wave, 11 ms

Power Requirements

Input Voltage: 12 to 48 VDC (3-pin terminal block, V+, V-, SG)

Power Consumption:

5 W (with no load on the USB port)

- 106 mA @ 48 VDC
 - 191 mA @ 24 VDC
 - 351 mA @ 12 VDC
- 8.5 W (with load on the USB port)
- 176 mA @ 48 VDC
 - 330 mA @ 24 VDC
 - 661 mA @ 12 VDC

Regulatory Approvals

EMC: FCC, CE (Class A)

Safety: UL/cUL, CCC, LVD

Green Product: RoHS, CRoHS, WEEE

Reliability

Alert Tools: Built-in buzzer and RTC (real-time clock)

Automatic Reboot Trigger: Built-in WDT (watchdog timer)

Warranty

Warranty Period: 5 years

Details: See www.moxa.com/warranty

Software Specifications

Linux

Kernel Version: 2.6.9

Protocol Stack: TCP, UDP, IPv4, SNMP V1, ICMP, ARP, HTTP, CHAP, PAP, SSH 1.0/2.0, SSL, DHCP, NTP, NFS, Telnet, FTP, PPP, PPPoE, OpenVPN

File System: JFFS2, NFS, Ext2, Ext3, VFAT/FAT

System Utilities: bash, busybox, tinylogin, telnet, ftp, ssh, scp

ftpd: FTP server daemon

sshd: secure shell server

Apache: web server daemon, supporting PHP and XML package

openvpn: virtual private network service manager package

pppd: dial in/out over serial port daemon

snmpd: snmpd agent daemon package

openssl: open SSL

Modbus: API library for AI and thermocouple data acquisition

Application Development Software: Moxa Linux API device control

Linux Tool Chain:

- GCC (V3.3.2): C/C++ PC Cross Compiler


- Glibc (V2.2.5): POSIX standard C Library

- GDB (V5.3): source level debug server

Software Encryption Lock:

BINEncryptor: Encryption tool for binary files (based on patented Moxa technology)

Dimensions (unit = mm)

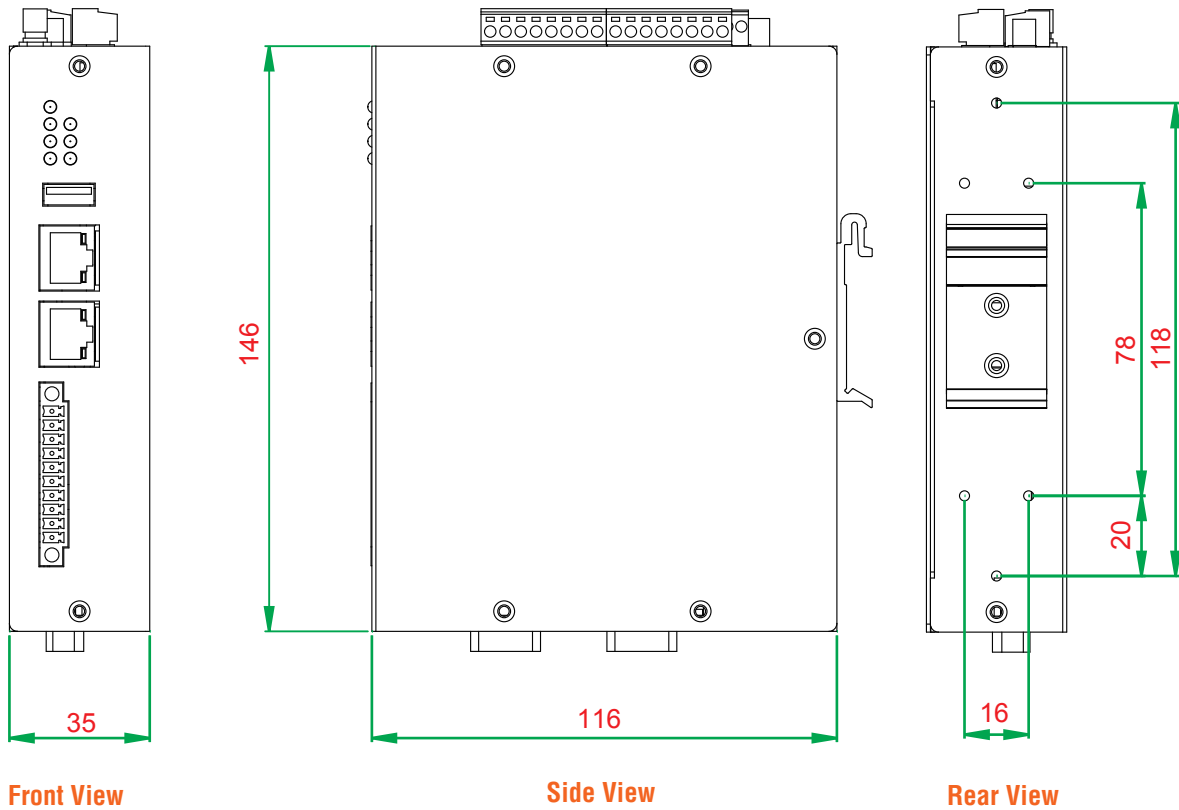

Ordering Information

Available Models

IA3341-LX: RISC-based embedded computer with 2 serial ports, 4 DIs, 4 DOs, 2 AIs, 2 thermocouples, dual LANs, SD, Linux

Package Checklist

- IA3341-LX embedded computer
- Wall mounting kit
- Ethernet cable: RJ45 to RJ45 cross-over cable, 100 cm
- CBL-4PINDB9F-100: 4-pin pin header to DB9 female console port cable, 100 cm
- Terminal block to power jack converter
- Document and Software CD or DVD
- Quick Installation Guide (printed)
- Product Warranty Statement (printed)