

IA261-I/262-I Series

RISC-based computers with 2 or 4 digitally isolated serial ports, dual LANs, VGA, CAN, DIO, CompactFlash, USB



- > Cirrus Logic EP9315 ARM9 CPU, 200 MHz
- > 128 MB RAM on-board, 32 MB flash disk
- > VGA interface for field site monitoring
- > 2 KV digitally isolated RS-232/422/485 serial ports
- > Dual 10/100 Mbps Ethernet for network redundancy
- > Dual 2 KV digitally isolated CAN ports with CANopen protocol support
- > 8+8 DI/DO with 3 KV optical isolation protection
- > 12 to 48 VDC redundant power input design
- > Supports CompactFlash and USB 2.0 hosts
- > Ready-to-run Linux or WinCE 6.0 platform
- > -40 to 75°C wide temperature models available



Overview

The IA261-I/262-I embedded computers come with 2 (IA262-I) or 4 (IA261) RS-232/422/485 serial ports, dual CANbus ports (IA262-I only), dual Ethernet ports, 8 digital input channels, 8 digital output channels, VGA output, 2 USB hosts, and a CompactFlash socket. The computers are housed in a compact, IP40 protected, industrial-strength aluminum case.


The IA261-I/262-I computers use the Cirrus Logic EP9315 ARM9, 32-bit, 200 MHz RISC CPU. This powerful computing engine supports several useful communication functions, but will not generate too much heat. The built-in 32 MB NOR Flash ROM and 128 MB SDRAM provide enough memory to run your application software directly on the IA261-I/262-I.

With its built-in VGA output interface, the IA261-I/262-I are suitable for use with SCADA systems in industrial applications, such as manufacturing automation, production line process monitoring, and mining automation, that require VGA and HMI features.

The IA261-I/262-I computers support RS-232/422/485, CANbus, digital I/O, come with 2 KV isolation protection, and have dual LAN ports, making them ideal as communication platforms for industrial applications that require network redundancy. In addition to the standard models, wide temperature (-40 to 75°C) models are available for use in harsh industrial automation environments.

The IA261-I/262-I computers come with Windows CE 6.0 pre-installed, and support general Windows and .NET 2.0 computing environments. This means that programs developed for standard PC operating systems with tools such Embedded Visual C++ or Visual Studio 2005 can run on the IA261-I/262-I without much porting effort.

Appearance

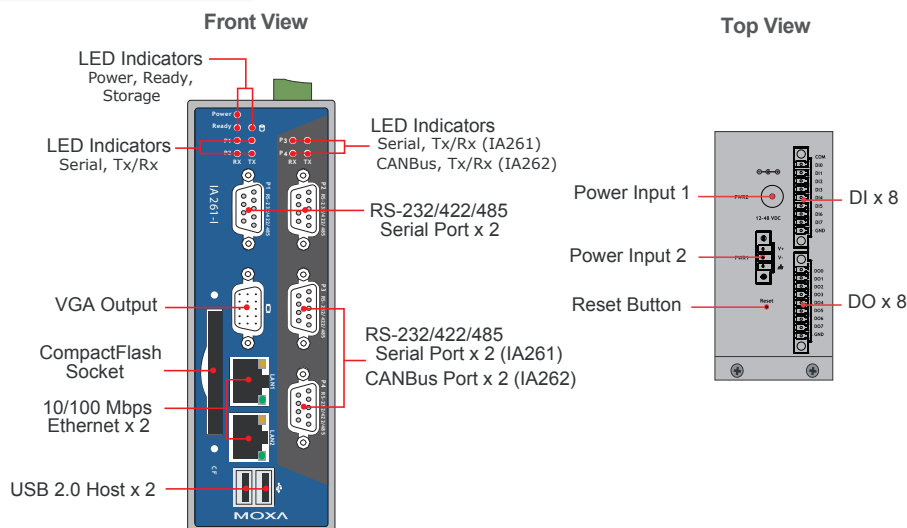

Hardware Specifications

Computer

CPU: Cirrus EP9315 ARM9 CPU, 200 MHz

OS (pre-installed): Windows CE 6.0 or Linux

DRAM: 128 MB onboard

Flash: 32 MB onboard

USB: USB hosts x 2, compliant with USB 2.0 (OHCI) type A connectors

Storage

Storage Expansion: CompactFlash slot

Display

Graphics Controller: EP9315 internal graphics accelerator engine with TTL graphical signal support

Display Memory: Dynamic video memory (shares system memory)

Display Interface: CRT interface for VGA output, DB15 female connector

Resolution: 1024 x 768, 8 bits

Ethernet Interface

LAN: 2 auto-sensing 10/100 Mbps ports (RJ45)

Magnetic Isolation Protection: 1.5 KV built-in

Serial Interface

Serial Standards: 2 or 4 RS-232/422/485 ports, software-selectable (DB9 male)

ESD Protection: 15 KV for all signals

Isolation: 2 KV digital isolation

Console Port: RS-232 (TxD, RxD, GND), 4-pin header output (115200, n, 8, 1)

Serial Communication Parameters

Data Bits: 5, 6, 7, 8

Stop Bits: 1, 1.5, 2

Parity: None, Even, Odd, Space, Mark

Flow Control: RTS/CTS, XON/XOFF, ADDC™ (automatic data direction control) for RS-485

Baudrate: 50 bps to 921.6 Kbps (supports non-standard baudrates; see user's manual for details)

Serial Signals

RS-232: TxD, RxD, DTR, DSR, RTS, CTS, DCD, GND

RS-422: TxD+, TxD-, RxD+, RxD-, GND

RS-485-4w: TxD+, TxD-, RxD+, RxD-, GND

RS-485-2w: Data+, Data-, GND

Digital Input

Input Channels: 8, source type

Input Voltage: 0 to 30 VDC at 5 KHz

Digital Input Levels for Dry Contacts:

- Logic level 0: Close to GND
- Logic level 1: Open

Digital Input Levels for Wet Contacts:

- Logic level 0: +3 V max.
- Logic level 1: +10 V to +30 V (COM to DI)

Connector Type: 10-pin screw terminal block (8 points, COM, GND)

Isolation: 3 KV optical isolation

Digital Output

Output Channels: 8, sink type

Output Current: Max. 200 mA per channel

On-state Voltage: 24 VDC nominal, open collector to 30 V

Connector Type: 9-pin screw terminal block

Isolation: 3 KV optical isolation

CANbus Communication (IA262-I only)

Interface: Dual optically isolated CAN2.0A/2.0B compliant ports

CAN Controller: Phillips SJA1000T

Signals: CAN-H, CAN-L

Protocols: Supports CANOpen library

Isolation: 2 KV digital isolation

Speed: 10 Kbps to 1 Mbps

Connector Type: DB9 male

LEDs

System: Power, Ready, Storage

LAN: 10M/Link x 2, 100M/Link x 2 (on connector)

Serial: TxD x 4, RxD x 4

IA261-I: P1 to P4 for serial ports

IA262-I: P1 to P2 for serial ports, P3 to P4 for CAN ports

Switches and Buttons

Reset Button: Supports "Reset to Factory Default"

Physical Characteristics

Housing: Aluminum, industrial vertical form factor

Weight: 950 g

Dimensions: 60 x 115 x 152 mm (2.36 x 4.53 x 5.98 in)

Mounting: DIN-Rail, wall

Environmental Limits

Operating Temperature:

Standard Models: -10 to 60°C (14 to 140°F)

Wide Temp. Models: -40 to 75°C (-40 to 167°F)

Operating Humidity: 5 to 95% RH

Storage Temperature:

Standard Models: -20 to 80°C (-4 to 176°F)

Wide Temp. Models: -40 to 85°C (-40 to 185°F)

Anti-vibration: 5 g rms @ IEC-68-2-34, random wave, 5-500 Hz, 1 hr per axis

Anti-shock: 50 g @ IEC-68-2-27, half sine wave, 11 ms

Power Requirements

Input Voltage: Redundant power input design

PWR1: 12 to 48 VDC (3-pin terminal block)

PWR2: 12 to 48 VDC (power jack with thread)

Power Consumption:

With no load on USB ports: 5.8 W

- 240 mA @ 24 VDC

- 480 mA @ 12 VDC

With full load on USB ports: 11 W

- 450 mA @ 24 VDC

- 900 mA @ 12 VDC

Regulatory Approvals

EMC: CE (Class A), FCC

Safety: UL/cUL

Green Product: RoHS, WEEE

Reliability

Alert Tools: Built-in buzzer and RTC (real-time clock)

Automatic Reboot Trigger: Built-in WDT (watchdog timer)

Warranty

Warranty Period: 5 years

Details: See www.moxa.com/warranty

Note: The Hardware Specifications apply to the embedded computer unit itself, but not to accessories. In particular, the wide temperature specification does not apply to accessories such as the power adaptor and cables.

Software Specifications

Linux

Kernel Version: 2.6.23

Protocol Stack: ARP, PPP, CHAP, PAP, IPv4, ICMP, TCP, UDP, DHCP, FTP, SNMP V1, HTTP, NTP, NFS, SMTP, SSH 1.0/2.0, SSL, Telnet, PPPoE, OpenVPN

File System: JFFS2, NFS, Ext2, Ext3, VFAT/FAT

System Utilities: bash, tinylogin, telnet, ftp, smtpclient, scp

telnetd: telnet server daemon

sshd: secure shell server

Apache: web server daemon

openvpn: virtual private network

pppd: dial in/out over serial port daeon

snmpd: snmpd agent daeon

inetd: TCP server manager program

openssl: open SSL

Linux Tool Chain:

- GCC (V4.2.1): C/C++ PC Cross Compiler
- GDB (V5.3): Source level debug server
- Glibc (V2.2.5): POSIX standard C library

Windows Embedded CE 6.0

System Utilities: Windows command shell, telnet, ftp, web-based administration manager

File System: FAT (on-board flash)

Protocol Stack: TCP, UDP, IPv4, SNMP V2, ICMP, IGMP, ARP, HTTP, CHAP, PAP, SSL, DHCP, SNTP, Telnet, FTP, PPP

Telnet Server: Allows remote administration through a standard telnet client.

FTP Server: Used for transferring files to and from remote computer systems over a network.

Web Server (httpd): Includes ASP, ISAPI Secure Socket Layer support, SSL 2, SSL 3, Transport Layer Security (TLS/SSL 3.1) public key-based protocols, and Web Administration ISAPI Extensions.


Dial-up Networking Service: RAS client API and PPP, supporting Extensible Authentication Protocol (EAP) and RAS scripting.

Watchdog Server: CPU hardware function for resetting the CPU in a user-specified time interval; activated by a Moxa library function

Application Development Software:

- Moxa WinCE 6.0 SDK
- C Libraries and Run-times
- Component Services (COM and DCOM)
- Microsoft® .NET Compact Framework 2.0 with SP2
- XML, including DOM, XQL, XPATH, XSLT, SAX
- SOAP Toolkit
- Winsock 2.2

Dimensions

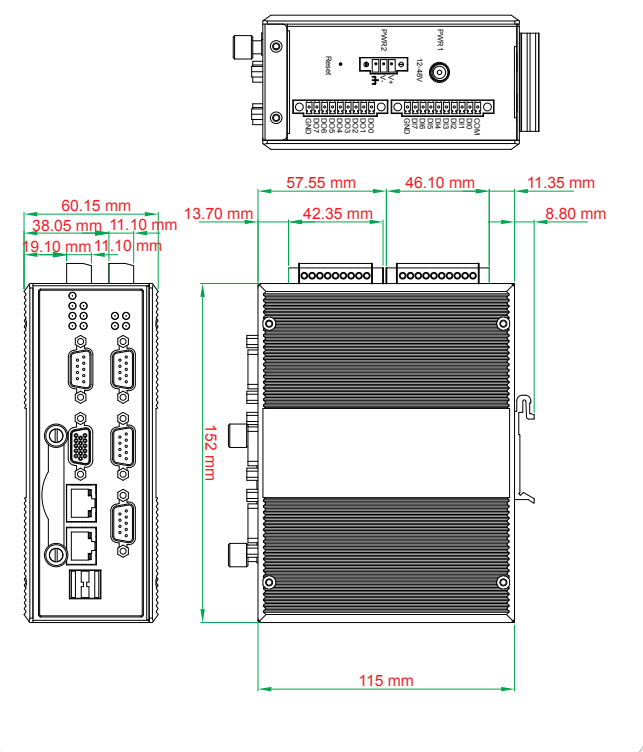

Ordering Information

Available Models

IA261-I-LX: RISC-based embedded computer with 4 serial ports, DIO, dual LANs, VGA, CompactFlash, USB, Linux OS, -10 to 60°C operating temperature

IA261-I-CE: RISC-based embedded computer with 4 serial ports, DIO, dual LANs, VGA, CompactFlash, USB, Win CE 6.0 OS, -10 to 60°C operating temperature

IA262-I-LX: RISC-based embedded computer with 2 serial ports, DIO, dual LANs, VGA, CANbus, CompactFlash, USB, Linux OS, -10 to 60°C operating temperature

IA262-I-CE: RISC-based embedded computer with 2 serial ports, DIO, dual LANs, VGA, CANbus, CompactFlash, USB, Win CE 6.0 OS, -10 to 60°C operating temperature

IA261-I-T-LX: RISC-based embedded computer with 4 serial ports, DIO, dual LANs, VGA, CompactFlash, USB, Linux OS, -40 to 75°C operating temperature

IA261-I-T-CE: RISC-based embedded computer with 4 serial ports, DIO, dual LANs, VGA, CompactFlash, USB, Win CE 6.0 OS, -40 to 75°C operating temperature

IA262-I-T-LX: RISC-based embedded computer with 2 serial ports, DIO, dual LANs, VGA, CANbus, CompactFlash, USB, Linux OS, -40 to 75°C operating temperature

IA262-I-T-CE: RISC-based embedded computer with 2 serial ports, DIO, dual LANs, VGA, CANbus, CompactFlash, USB, Win CE 6.0 OS, -40 to 75°C operating temperature

Package Checklist

- IA261-I or IA262-I computer
- Wall mounting kit
- DIN-Rail mounting kit
- Ethernet cable: RJ45 to RJ45 cross-over cable, 100 cm
- CBL-RJ45F9-150: 8-pin RJ45 to DB9 female console port cable, 150 cm
- CBL-RJ45M9-150: 8-pin RJ45 to DB9 male serial port cable, 150 cm
- Universal Power Adaptor
- Document and Software CD
- Quick Installation Guide (printed)
- Warranty Card